



Features

- Accuracy: $\pm 0.3\%$ FS
- Ergonomic, durable, heavy-duty metal construction
- Lighter weight, more suitable for handheld operation
- Reversible display
- Selectable Units: N, gf, kgf, ozf, and lbf
- Charger with US/EUR/UK Plugs selectable


Models	Capacity/Resolution					Order No.
	N	kgf	lbf	Ozf	gf	
EFG10E	10/0.01	1/0.001	2.2/0.001	35/0.01	1000/1	EON412a0000
EFG50E	50/0.01	5/0.001	11/0.01	180/0.1	5000/1	EON412b0000
EFG100E	100/0.1	10/0.01	22/0.01	350/0.1	-	EON412c0000
EFG500E	500/0.1	50/0.01	110/0.1	1800/1	-	EON412d0000
EFG1000E	1000/1	100/0.01	220/0.1	3500/1	-	EON412e0000



Specifications

Accuracy:	$\pm 0.3\%$ F.S.
Units:	N, gf, kgf, ozf, and lbf. (Selectable)
Display:	160*128 matrix LCD with Backlight
Overload Capacity:	120% F.S.
Measurement Mode:	Track, Peak, Preset
Sampling Rate:	1000 Hz
Memory:	500 data
Temperature Effects:	$<0.03\%$ FS/ $^{\circ}\text{C}$
Power:	Ni-MH rechargeable batteries
Charger / Adaptor:	USB charger, Input: 110~240VAC
Outputs:	USB, Set point output, RS232C
Operating Environment:	-10 to 40 $^{\circ}\text{C}$, 20 to 80%RH
Dimensions:	150*72*33mm
Weight:	0.45 kg (1 lb)

Dimensions

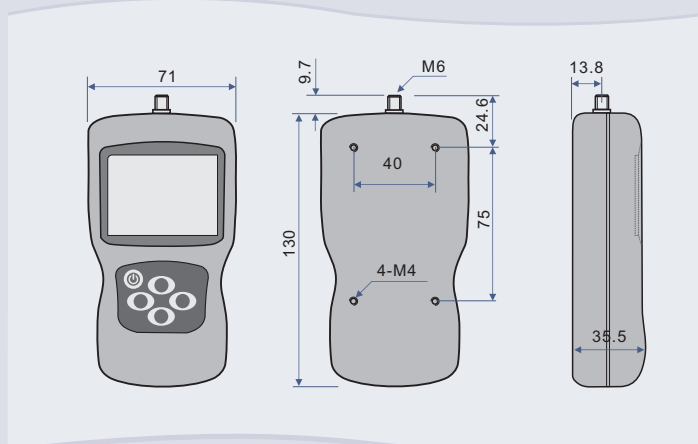

Optional

MiniPrinter	Rs232 Cable
EPX58P-F	ECB-MD8-DB9
EON311f0000	EON912d0000
Motorised Test Stand	Manual Test Stand
EST-FG2	EST-FG1
EON410b(c)0000	EON410a0000



Package