



Features

- Replace common dial Rockwell indicator, digitizing with the most economical and convenient way.
- Color LCD display
- Support all Rockwell hardness test scales, include superficial Rockwell and plastics Rockwell.
- Multiple standard hardness conversions
- Integrated power supply system. Fully compatible with battery and external power supplies.
- Various fixing method, suitable for manual or motorized tester..
- Variety of data management and processing functions.
- USB port and wireless interface for data upload to PC.
- Wireless printing.

Specifications

Scale	Rockwell			Superficial Rockwell			Plastics Rockwell		
	HRA	HRF	HRM	HR15N	HR45T	HR30X	HRE	HRK	HRL
Resolution	0.1HR(0.001mm)								
Displayer	320*240 TFT LCD								
Memory	500 readings								
Conversion	GB/T 1172, GB/T 3771, ISO 18265, ASTM E140								
Statistics	Mean, Range								
Communication	USB, wireless serial port (Receiver optional)								
Printing	Wireless(Printer optional)								
Power	Ni-MH batteries. Recharging: USB recharger AC100~240V ; DC5V, 1A External power supply: DC 5V, 0.5A								
Dimension	~ Φ 114x 37 mm								
Weight	~ 420gr								
Standards	GB/T 230, ASTM E18, ISO 6508								



Test Interface



Setup Interface



Optional

Mini Printer	Wireless Transceiver
EP558P	EWT-USB1
	
EON3110000	EON71100000

Package



Indicator



USB Data Cable



Power Adapter




Recharge Cable

Data Output




Mounting Dimensions


EHMC-1




EHMC-2




EHMC-3

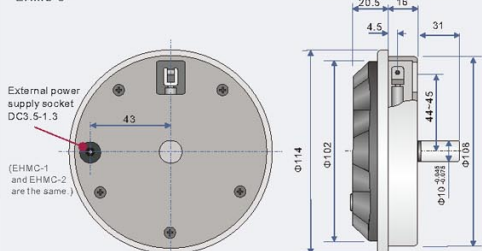

EHMC-1



EHMC-2



EHMC-3

